

# INSTRUCTIONS FOR INSTALLING THE 4G ROUTER MOD. RUT-241




The router package will contain the following items:

- The router with the bracket for attaching it to the cabinet flange already assembled;
- The power cable ready for wiring
- The necessary items for inserting the SIM card into the router.



To insert the SIM card (not supplied by Sisgeo), open the SIM card slot as indicated in the picture

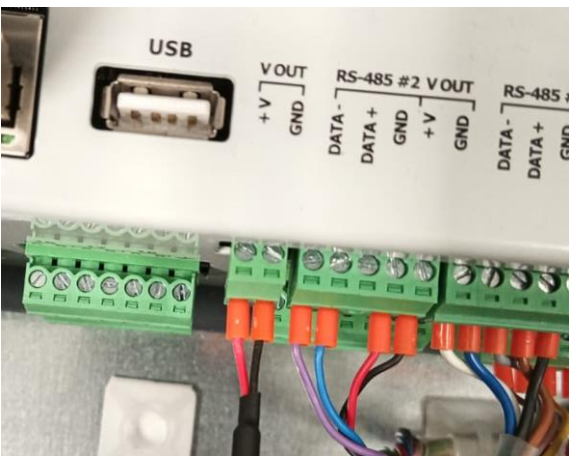

The power cable provided must be connected to the OMNIALog terminal block, in the V OUT section, as follows:

- RED wire to +V;
- BLACK wire to GND.



Then the other side of the power cable must be connected to the router as in the picture

# INSTRUCTIONS FOR INSTALLING THE 4G ROUTER MOD. RUT-241



Now connect one end of the LAN cable supplied inside the cabinet to the “LAN” port on the OMNIAlog, and the other end to the “LAN” port on the router (do NOT connect the cable on “WAN” port)



Locate the flange inside the cabinet where the router will be installed.



Insert the router onto the cabinet flange so that the router part with the antenna connectors is facing upwards. Press down firmly to lock the router in place until you hear a CLICK.



Last step: connect BOTH antennas to the two connectors labelled as “MOBILE” on the router as shown in the image. The antenna cables must pass through the lower cable gland on the cabinet. The antennas must be positioned so as to have a signal strong enough for data transmission.