

WR_LOG

— WR LOG

WIRELESS MONITORING
SYSTEM

READOUT UNITS
AND DATALOGGERS





WR LOG WIRELESS MONITORING SYSTEM

WR LOG wireless monitoring system nodes can be connected to a wide variety of sensors and communicate with the Gateway using a Long Range Radio. Nodes can be easily set up through an Android app and the system offers a simple visualization web based software.

WR LOG is a low power consumption system that can reach up to 10 years battery life. Distance between node and gateway can arrive up to 15 km.

The system allows the remote connection and offers near real time data that can be pushed to other visualization softwares through FTP, API calls and Modbus TCP.

FEATURES

- Long-range communication of over 15km
- Truly low-power, 10 years of unattended runtime
- Wireless LPWA communication
- Supports most structural and geotechnical instruments
- User-friendly web software

BENEFITS

- Remotely monitor hard-to-access infrastructures
- Cover a wide area with geotechnical sensors
- Easily add sensors to extend measurement range
- Save resources through fast implementation
- Diminish risks and make operations safer



Meet the essential requirements of the EMC Directive 2014/30/EU and RED directive 2014/53/EU

4G GATEWAY OLSWR000GW4

It is an outdoor LoRa gateway equipped with a 4G Worldwide module with 3G/2G fallback. The gateway receives readings from the nodes and pushes data through the integrated 4G modem to a server for management and visualization. It includes an external waterproof connectors (RJ45, SIM card), an easy installation mounting kit and USB (Type C) connector for local access. The internal processor can manage up to 50 data messages every minute in single gateway network architecture. The gateway incorporates 1 x green LED for power and 1 x red LED for system status. The SIM card port accepts mini-SIM format.

TECHNICAL SPECIFICATIONS

PRODUCT CODES: ⁽¹⁾	
OLSWR868GW4	RX: 863- 873MHZ, TX: 863-873MHZ
OLSWR915GW4	RX: 902-915MHZ, TX: 922-928MHZ
OLSWR923GW4	RX: 915-928 MHz, TX: 915-928MHZ (according to hardware capabilities)
BASE STATION	
Band	ISM Sub 1 GHz sensitivity down to -137 dBm (SF11)
Integrated internal antennas	GPS, 4G and LoRa (peak gain = 2.6dBi)
Memory	DDRAM 256MB, 8GB eMMC (6GB available for user)
GNSS receiver	GPS, GLONASS, QZSS & SBAS
External antenna (included)	3 dBi vertical omni-directional, 30cm length 868/915/923 MHz
POWER	
Powered by	- PoE both Mode A and Mode B (802.3af specifications) - ±48 VDC through RJ45 (isolated power)
Mean power consumption	4.5 Watts
Power over Ethernet	PoE injector for indoor use included in the kit
NETWORK INTERFACES	
Ethernet	10/100 Ethernet WAN (RJ45 PoE) (LAN cable not included)
Integrated 4G Modem ⁽²⁾	Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE coverage

(1) For more information regarding how to choose the right Gateway band, see FAQ #089 on our web site www.sisgeo.com
 (2) WWAN capabilities are listed in F.A.Q.#107 on www.sisgeo.com.



PHYSICAL FEATURES

Overall Dimensions	265x165x100 mm without ext. antenna
Weight	1.4 kg (mounting kit included)
IP class	IP67
Materials: Back	Aluminum
Front	Polycarbonate
Mounting kit	Stainless steel
Operating temp. range	-40°C to +60°C

VIBRATING WIRE NODES OLSWR1CHVWS/OLSWR5CHVW0

The vibrating wire nodes are able to manage 1 or up to 5 vibrating wire instruments such as piezometers, crack meters, strain gauges, etc... It has an embedded barometer useful for piezometers' data compensation. Examples of application are column of multipoint piezometers, 3-D crack meters, rosette-mounting strain gauges, multipoint extensometers. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Number of channels	1 or 5 (vibrating wire + thermistor)
Sampling rate	30 seconds to 1 day
Internal data storage	Up to 72500 readings incl. time and 5 sensors Up to 200000 readings incl. time and 1 sensor
Time synchronization by radio	time discipline better than ± 10 seconds
Power supply	1 CH: 1 x C-size 3.6V high power battery 5 CH: from 1 to 4 x C-size 3.6V high power batteries

VIBRATING WIRE INPUT

Measurement method	Embedded algorithms increasing immunity to noise		
Excitation wave	± 5 V		
Measurement range	300 to 7000 Hz		
	Excitation frequency	Accuracy	Resolution
Sweep A	450 - 1125 Hz	0.013%	0.002 Hz
Sweep B	800 - 2000 Hz	0.008%	0.002 Hz
Sweep C	1400 - 3500 Hz	0.010%	0.004 Hz
Sweep D	2300 - 6000 Hz	0.009%	0.007 Hz

THERMISTOR INPUT

Measurement range	0 Ω to 4 M Ω
Resolution	1 Ω
Accuracy (20°C)	0.05°C (0.04% FS)

EMBEDDED BAROMETER

Pressure Range	300 to 1100 hPa
Relative Accuracy (950 to 1050 hPa at 25°C)	± 0.12 hPa

PHYSICAL FEATURES

Box Dimensions (WxLxH)	
1 channel node	100x100x61 mm
5 channels node	100x200x61 mm
Overall Dimensions without antenna (WxLxH)	
1 channel node	140x120x61 mm
5 channels node	140x220x61 mm
External antenna	114 mm length (including connector)
Housing material	Aluminium alloy
IP class	IP67
Weight (without antenna and batteries)	
1 channel node	0.66 kg
5 channels node	1.27 kg
Operating temperature	-40°C to +80°C

BATTERY LIFE ESTIMATION⁽¹⁾

1 CH, sampling 5 min, 1 x battery	1 year
1 CH, sampling 1 hour, 1 x battery	3.5 years
5 CH, sampling 5 min, 4 x batteries	2.2 years
5 CH, sampling 1 hour, 4 x batteries	7.1 years

(1) Based on mathematical model using SAFT LSH14 batteries, SF8. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

Bear in mind that consumption varies depending on the sensor used, sampling rate and environmental conditions.

ANALOG NODE OLSWR4CHANLO

Analog nodes are 4 channel devices that support several voltage output, 4-20mA output, potentiometer, Wheatstone bridge, thermistor and PT100. Each channel can be individually configured according to the sensor output.

Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Number of channel	up to 4 (individually configurable by the user)
Sampling rate	30 seconds to 1 day
Internal data storage	Up to 200000 readings incl. time and 1 sensor Up to 72500 readings incl. time and 4 sensors)
Time synchronization by radio	time discipline better than ± 10 seconds
Instruments power supply	5 V DC / 12 V DC / 24 V DC (up to 60 mA) selectable for each channel
Power supply	from 1 to 4 x C-size 3.6 V high power battery
INSTRUMENT INPUTS	
Voltage measuring ranges	± 10 V DC
Voltage output accuracy (-40 to +85°C)	± 0.05 % FS
Current loop 4-20mA accuracy (-40 to +50°C)	± 0.05 % FS
Potentiometer accuracy (0 to +50°C)	± 0.02 % FS
Wheatstone bridge accuracy (0 to +50°C)	± 0.1 % FS (full bridge) ⁽¹⁾
Thermistor accuracy (0 to +50°C)	± 0.2 °C
PT-100 accuracy (20°C)	± 0.8 °C

(1) In case of reading of a Wheatstone bridge gauge, we suggest to have maximum 30m of signal cable from gauge to node

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x200x61 mm
Overall Dimensions without antenna (WxLxH)	140x220x61 mm
External Antenna	114 mm length (including connector)
Housing material	Aluminium alloy
IP class	IP67
Operating temperature	-40°C to +80°C
Weight (without antenna and batteries)	1.10 kg

BATTERY LIFE ESTIMATION⁽²⁾

	Current @ 12V @ 24 mA, SF9	Current @24V @24 mA, SF9	Voltage @ 12V @ 24 mA, SF9	Full Wheatstone bridge @5V @350 Ω , SF8	POT @5V @1 k Ω , SF8
Warm-up time	1 seconds	1 seconds	1 seconds	-	-
1 channel, sampling 5 minutes	6 months	4 months	5.4 months	1.4 years	1.5 years
1 channel, sampling 6 hours	>10 years	>10 years	>10 years	>10 years	>10 years
4 channels, sampling 5 minutes	2.2 months	1.4 months	2 months	3.8 months	5.2 months
4 channels, sampling 6 hours	8.8 years	6.4 years	8.4 years	>10 years	>10 years

(2) Estimations with 4 SAFT LSH14 batteries, based on mathematical models. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

MINI NODE OLSWR1CHANPO

The Mini node is the easiest way to connect an electric load cell to WR LOG wireless network. Mini node can also manage potentiometers, ratiometric sensors and pulses (i.e. rain gauges). On a dedicated channel can be also connected a thermistor probe. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Number of channels	1 individually (configurable, no thermistor) 1 thermistor (not configurable) 1 pulse counter (not configurable)
Sampling rate	30 seconds to 1 day
Internal data storage	Up to 200000 readings incl. time
Instruments power supply	5 V DC (up to 50 mA)
Power supply	1 or 2 x C-size 3.6 V high power battery

INSTRUMENT INPUTS

Potentiometer/Ratiometric measuring ranges	0÷5 V DC , 0÷1 V/V
Potentiometer/Ratiometric accuracy (-40 to +80°C)	0.1% FS
Full Wheatstone bridge measuring ranges	±7.8 mV/V (4-wires) ⁽¹⁾
Full Wheatstone bridge accuracy (-40 to +80°C)	0.13 %FS
Single-ended voltage ranges	0÷5 V DC
Single-ended voltage accuracy (-40 to +80°C)	0.6% FS
Thermistor measuring ranges	0 to 2 MΩ
Thermistor ⁽²⁾ accuracy (-40 to +80°C)	0.04 °C (thermistor sensor error not included)
Pulse (dry contact) accuracy	±1 pulse
Pulse (dry contact) rate	0 to 50 Hz
Built-in temperature sensor accuracy	±2°C

(1) In case of reading of a Wheatstone bridge gauge, we suggest to have maximum 30m of signal cable from gauge to node

(2) Thermistor model: 3000 Ω@25°C

PHYSICAL FEATURES

Box Dimensions (WxLxH)	113x80x60 mm
Overall Dimensions (WxLxH)	120x80x60 mm
Housing material	Polycarbonate
IP class	IP67
Operating temperature	-40°C to +80°C
Weight (without batteries)	0.24 kg
Antenna	Internal antenna

BATTERY LIFE ESTIMATION⁽³⁾

	1 x battery	2 x batteries
sampling 5 minutes	0.9 year	1.8 years
sampling 1 hour	5.0 years	8.1 years
sampling 6 hours	6.5 years	9 years

(3) Based on the lifetime mathematical model, SF9, potentiometer + thermistor. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

DIGITAL NODE

PRODUCT CODE OLSWRDIG000

Digital node can manage 1 chain of Sisgeo digital instruments such as BH-profile in-place inclinometers, MD-Profile inclinometers, LT-Inclibus, MEMS in-place inclinometers, tiltmeters, Railway Deformation System (RDS), extensometer probes (DEX), extenso-inclinometer probes (DEX-S), liquid settlement system (H-level), load cells and multipoint borehole extensometers (MPBX), amongst others. For the maximum number of gauge in the chain and the needed power supply, please refer to the related table in next page. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Input	One RS485 channel and two SDI-12 channels
RS485 mode	Modbus RTU, full or half-duplex supported
Instruments power supply	regulated 12 VDC (up to 200 mA)
Sampling rate	30 seconds ¹ to 1 day
Time synchronization by radio	time discipline better than ±30 seconds
Power supply	4 x C-size 3.6 V high power battery

(1) Depending from the model of the gauges connected, numbers and powering mode

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x200x61 mm
Overall Dimensions without antenna	140x220x61 mm
External Antenna	114 mm length (including connector)
Housing material	Aluminium alloy
Operating temperature	-40°C to +80°C
IP grade	IP67
Weight (without batteries and antenna)	1.15 kg

INTERNAL BATTERY LIFE ESTIMATION⁽²⁾

10 IPI (always on), sampling 5 minutes	60 days
30 IPI (always on), sampling 5 minutes	12 days
30 IPI (always on), sampling 30 minutes	72 days (2.3 months)
30 IPI (always on), sampling 6 h	864 days (28.4 months)
10 IPI (timed mode), sampling 5 minutes	80 days
30 IPI (timed mode), sampling 5 minutes	22 days
30 IPI (timed mode), sampling 30 minutes	130 days (4.3 months)
30 IPI (timed mode), sampling 6 h	1500 days (4.1 years)

(2) Considering laboratory conditions. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

Data not valid for powering with external solar power kit.

MAXIMUM NUMBER OF DIGITAL INSTRUMENTS CONNECTED TO DIGITAL NODE

INSTRUMENT MODEL	MAXIMUM NUMBER OF GAUGES PER NODE WITH SISGEO V3 PROTOCOL	NEEDED EXTERNAL POWER SUPPLY ⁽¹⁾	NEEDED INSTRUMENTS' POWER CONFIGURATION ⁽²⁾
Digital BH-Profile IPIs, uniaxial and biaxial (model S431HD, S432HD, S441HD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital IPIs, uniaxial and biaxial (Model S411HD, S412HD, S421HD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital MD Profiles, uniaxial and biaxial (Model MDP30V, MDP30H)	up to 30 gauges ⁽³⁾	NO	from 1 to 30 gauges: ALWAYS-ON or TIMED
Digital LT Inclibus, uniaxial and biaxial ⁽⁴⁾ (Model LTIBV, LTIBH)	up to 30 gauges ⁽³⁾	NO	from 1 to 30 gauges: ALWAYS-ON or TIMED
Digital Tiltmeters, uniaxial and biaxial (Model S541HD, S542HD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital H-Levels (Model HLEV000D)	up to 30 gauges	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital RDS gauges (Model S7RDSHD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital DEX and DEX-S gauges (Model DEX350000D, DEX35S000D)	up to 18 gauges	YES	from 1 to 18 gauges: TIMED
Digitalized anchor load cells (Model L200 + 0ELCDIG4850)	up to 30 gauges	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digitalized Resistive Piezometers (Model P235) <i>Available on request</i>	up to 30 gauges	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digitized MPBX or MEXID extensometers up to 2 anchor points each extensometer (Model D2MX02D)	up to 30 extensometers	NO	from 1 to 15 extensometers: ALWAYS-ON or TIMED from 16 to 30 extensom: TIMED
Digitized MPBX or MEXID extensometers 3 anchor points each extensometer (Model D2MX03D)	up to 18 extensometers	NO	from 1 to 15 extensometers: ALWAYS-ON or TIMED from 16 to 18 extensom: TIMED
Digitized MPBX or MEXID extensometers up to 6 anchor points each extensometer (Model D2MX04D)	up to 12 extensometers	NO	from 1 to 12 extensometers: ALWAYS-ON or TIMED

(1) If the external power supply is needed, add to the order the accessories' codes 0AX10W003AH (solar panel kit) and 0OMX24V030W (digital sensor kit).

(2) For more information regarding the power configuration of digital instruments please refer to F.A.Q.#094 "Which are the available powering modes for SISGEO digital sensors?" on Sisgeo web site <https://www.sisgeo.com/>.

(3) Extensible up to 50 units using "50 incl sin" protocol, under certain conditions: all the sensors in the chain shall be same model of sensors, shall be tilt sensors (uniaxial or biaxial, triaxial sensors are not allowed), output measuring unit shall be sin(angle), powering mode shall be TIMED with warm-up time 3 seconds and address delay 3 seconds, sensors shall have continuous RS-485 addresses from 1 to X (with $X \leq 50$).

(4) Each LTInclibus can have 1, 2 or 4 gauges. Please take into consideration the number of gauges, not the number of 2m rods instrumented.

MAXIMUM NUMBER OF 360° INCLINOMETERS CONNECTED TO DIGITAL NODE

INSTRUMENT MODEL	PROTOCOL UTILIZED ⁽¹⁾	MAX. NUMBER OF GAUGES PER NODE	NEEDED EXT. POWER SUPPLY ⁽²⁾	INSTRUMENTS' POWER CONFIGURATION ⁽³⁾
360° digital tiltmeters, triaxial (model 0S543HD3600)	INCLI360_1-2-3	40	NO	from 1 to 20 gauges: ALWAYS-ON or TIMED from 21 to 50 ⁽⁴⁾ gauges: TIMED
	INCLI360_1-4	50		
	INCLI360_2-5	50		
	INCLI360_3-6	50		
	INCLI360_ACC	50		
360° digital LT-Inclibus, triaxial ⁽⁵⁾ (model 0LTIB103602, 0LTIB203602 and 0LTIB403602)	INCLI360_1-2-3	40	NO	from 1 to 20 gauges: ALWAYS-ON or TIMED from 21 to 50 ⁽⁴⁾ gauges: TIMED
	INCLI360_1-4	50		
	INCLI360_2-5	50		
	INCLI360_3-6	50		
	INCLI360_ACC	50		

(1) Various protocols are available for 360° triaxial sensors. For the most common applications, we recommend using the "INCLI360_1-2-3" protocol, which allows all three main channels of each instrument to be read.

The "INCLI360_ACC" protocol allows reading the three calibrated gravity accelerations gx, gy and gz.

To be able to use the other protocols "INCLI360_1-4" (reading channels 1 and 4), "INCLI360_2-5" (reading channels 2 and 5) and "INCLI360_3-6" (reading channels 3 and 6), check on the instrument's user manual if your application allows the use of these protocols.

(2) If the external power supply is needed, add to the order the accessories' codes 0AX10W003AH (solar panel kit) and 0OMX24V030W (digital sensor kit), or 0AXBCO22015 (mains power supply kit) and 0OMX24V030W (digital sensor kit).

(3) For more information regarding the power configuration of digital instruments please refer to F.A.Q.#094 "Which are the available powering modes for SISGEO digital sensors?" on Sisgeo web site <https://www.sisgeo.com/>.

(4) If the protocol used is "INCLI360_1-2-3," the maximum number of TIMED instruments readable with the digital node is 40.

(5) Each LT-Inclibus can have 1, 2 or 4 gauges. Please take into consideration the number of gauges, not the number of 2m rods instrumented.

POWERING ACCESSORIES

If a WR-LOG digital node is used to read a string of sensors that needs to be powered separately, a solar panel power kit or a kit with mains power should be provided.

SOLAR PANEL KIT 0AX10W003AH

It consists of a 10W solar panel (supplied without pole mount) with 10m cable and IP65 plastic box that houses a 2.3 Ah battery and charge controller. The box is ready for the digital sensor kit 0OMX24V030W (must be installed and supplied separately).

MAINS POWER SUPPLY KIT 0AXBCO22015

It consists of an AC/DC charger (Vin 85-265 Vac, 50-60 Hz, Vout 13.4 Vdc/0.9 A), and an IP65 plastic box that houses a 2.3 Ah battery. The box is ready for the digital sensor kit 0OMX24V030W (must be installed and supplied separately).

DIGITAL SENSOR KIT 0OMX24V030W

Consisting of a wiring board and a 30W 12V to 24V DC/DC converter. The digital instrument kit must be installed inside the box of either the 0AX10W003AH kit or the 0AXBCO22015 kit.

WIRELESS TILTMETER OLSWR03INC90

Node with embedded tri-axis tilt meter and temperature sensor for buildings and other civil structures monitoring. The inclinometer works with respect to gravity's direction.
Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Sampling rate	30 seconds to 1 day
Time synchronization by radio	time discipline better than ± 10 seconds
Power supply	from 1 to 2x C-size 3.6 V high power battery
INCLINOMETER SENSOR	
Technology	MEMS accelerometer
Axes	three (tri-axis)
Range	$\pm 90^\circ$
Accuracy ($\pm 2^\circ$)	$\pm 0.0025^\circ$
Accuracy ($\pm 4^\circ$)	$\pm 0.005^\circ$
Accuracy ($\pm 15^\circ$)	$\pm 0.013^\circ$
Accuracy ($\pm 45^\circ$)	$\pm 0.038^\circ$
Accuracy ($\pm 86^\circ$)	$\pm 0.060^\circ$
Resolution	0.0001°
Offse temperature dependancy	$\pm 0.002^\circ / ^\circ\text{C}$
Repeatability	$< 0.0003^\circ$
Stability @ 14 hours	$< 0.003^\circ$
Built-in temperature sensor resolution	0.1 °C
Built-in temperature sensor accuracy	$\pm 0.5^\circ\text{C}$

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x100x61 mm
Overall Dimensions without antenna	150x120x61 mm
External Antenna	100 mm length (including connector)
Housing material	Aluminium alloy
Operating temperature	-40°C to $+80^\circ\text{C}$
IP class	IP68 (2m max 2 hours)
Weight (without batteries and antenna)	0.6 kg
Vibration resistance	Do not subject the device to accelerations that exceed higher levels of accelerations than $\pm 8g$.

BATTERY LIFE ESTIMATION⁽¹⁾

sampling 30 sec - 2 x batteries	4.8 months
sampling 5 min. - 2 x batteries	3 years
sampling 1 hour - 2 x batteries	9.5 years

(1) Based on mathematical models, considering South Europe environmental conditions, SF8. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

WIRELESS TILTMETER & LASER DISTANCE GAUGE OLSWRLASEINC

Node with embedded tri-axis tiltmeter and laser distance gauge for measuring the relative distance between the gauge and another point (target or natural surface). The node include also a temperature gauge. Batteries are not included with the node and shall be ordered separately.



WR_LOG_EN_11_05/2025

TECHNICAL SPECIFICATIONS

Sampling rate	30 seconds to 1 day
Power supply	2x C-size 3.6 V high power battery

LASER DISTANCE GAUGE

Technology	Visible Laser Class II laser 655 nm	
Measuring range (considering favorable conditions)	from 0.05 m to 150 m	
Repeatability	0.15 mm	
Resolution	0.1 mm	
Accuracy:	favorable conditions ⁽¹⁾	unfavorable conditions ⁽²⁾
distance 1 m	±1 mm	±2 mm
distance 10 m	±1 mm	±2 mm
distance 20 m	±1.5 mm	±3 mm
distance 50 m	±4 mm	±7 mm
distance 100 m	±9 mm	±15 mm
distance 150 m	±16 mm	not applicable
Built-in temperature sensor accuracy	±1 °C	

TILTMETER ⁽³⁾

Technology	tri-axis MEMS accelerometer
Range	±90°
Accuracy (±2°)	±0.0025°
Accuracy (±86°)	±0.060°
Resolution	0.0001°
Offse temperature dependancy	0.002° / °C
Repeatability	<0.0003°
Stability @ 14 hours	<0.003°


PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x100x61 mm
Overall Dimensions without antenna	150x120x61 mm
External Antenna	100 mm length (including connector)
Housing material	Aluminium alloy
Operating temperature	-10°C to +50°C
IP class	IP68 (2m max 2 hours)
Weight (without batteries and antenna)	0.85 kg

BATTERY LIFE ESTIMATION ⁽⁴⁾

sampling 5 min, 2 x batteries	1.6 years
sampling 1 hour, 2 x batteries	9.1 years
sampling 6 hours, 2 x batteries	>10 years

(1) on natural objects (white wall, low target illumination <3K lx, moderate temperatures)
 (2) on natural objects (white wall, high target illumination with 30K lx, full specified operating temperature range)
 (3) for tiltmeter full specifications refer to "wireless tiltmeter" specifications
 (4) based on mathematical models, considering South Europe environmental conditions, SF8, and measurements at maximum distance of 20m. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

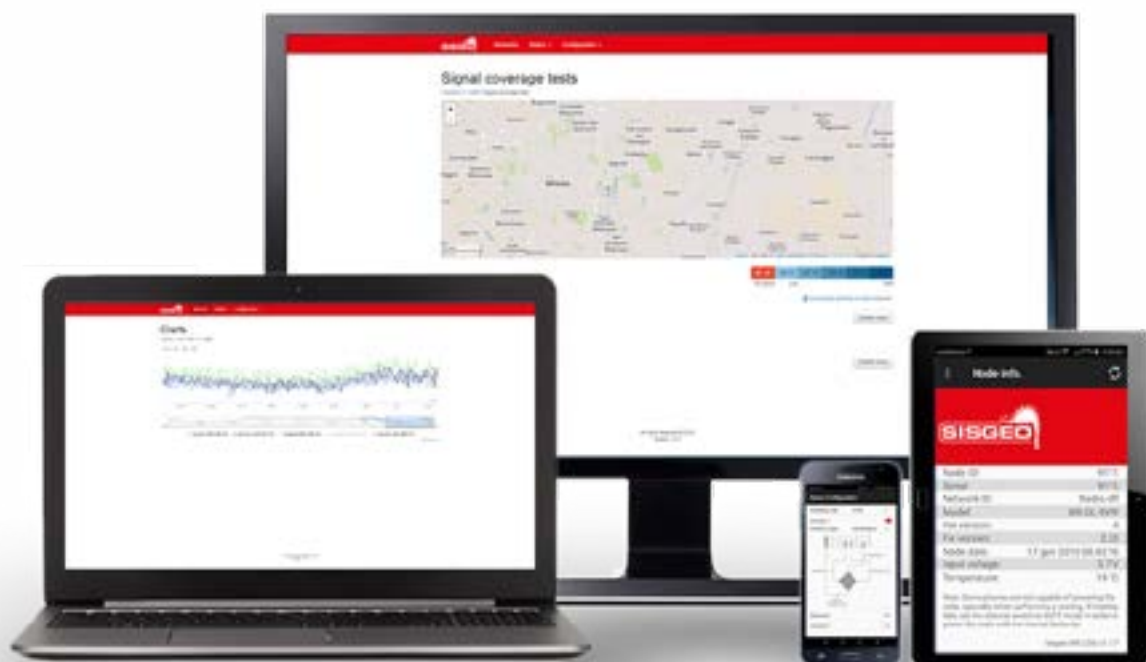

GATEWAY NETWORK AND ASSET MANAGEMENT SOFTWARE (ON BOARD WEB SERVER)

Network communications configuration and control

Wireless data unit and sensor attributes display

Wireless data unit configuration

Sensor data in near real time

Conversion of raw sensor data in engineering units

Manual and automatic data download in .csv

Data transmitted in a secure manner

Remote change of sensor's sampling rate

Data accessible through ModbusTCP

Able to push data on user FTP

WR LOG CONFIGURATION APP FOR NODES

Simple and fast connection to wireless node by USB-OTG cable

Runs on most Android devices supporting standard OTG USB cable

Easy sensor configuration: ID, sampling rate, frequency sweep, interface type, etc.

Checks radio signal coverage


Records coordinates (GPS)

Downloads data from wireless node and sends by e-mail or saves it on the Android device


Takes current reading

Updates wireless node firmware


TYPICAL SYSTEM ARCHITECTURE

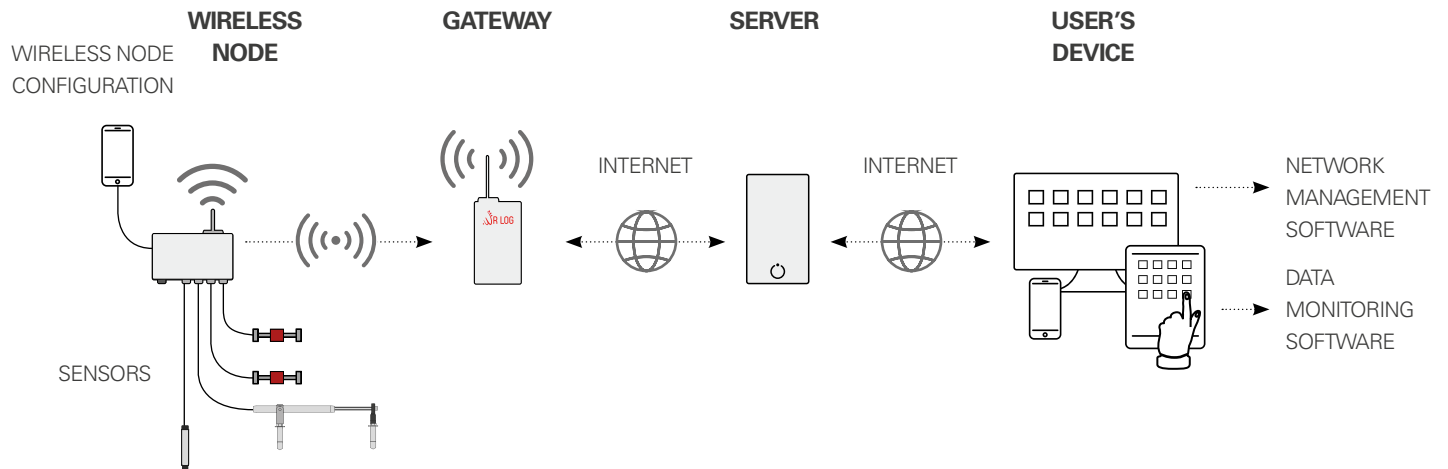


EXAMPLE OF CITY APPLICATION

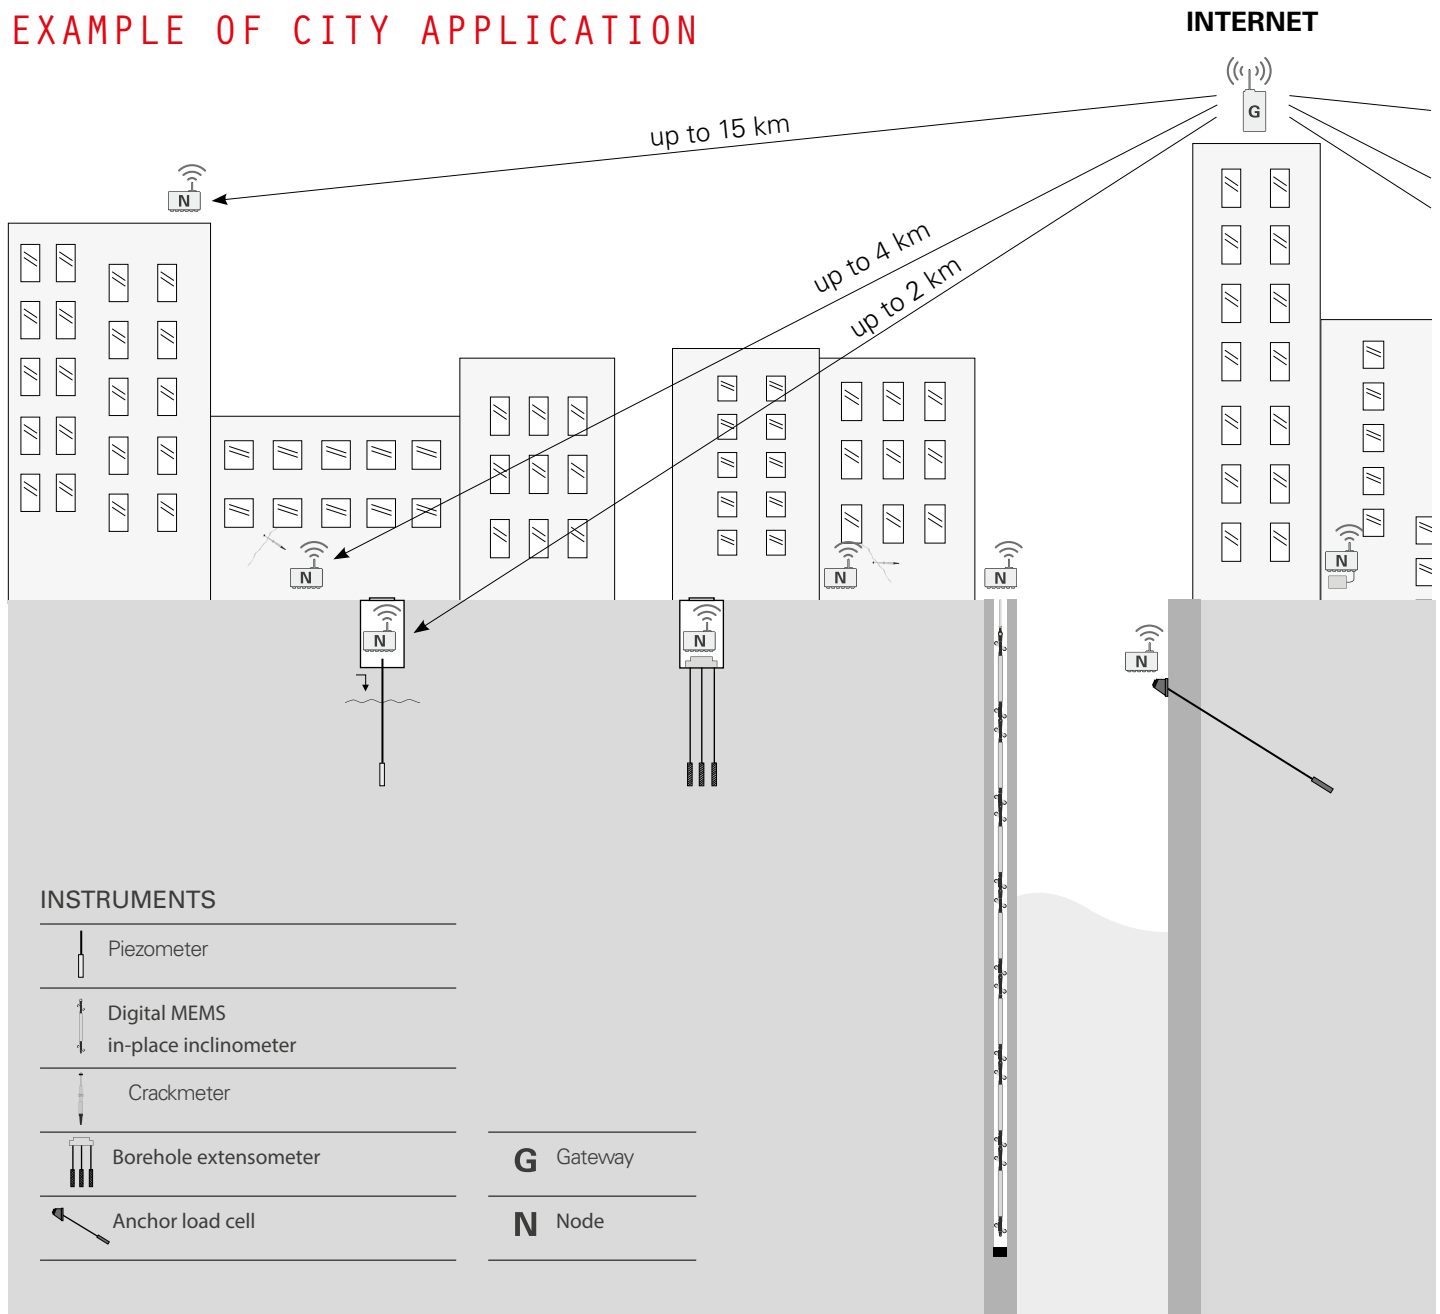


EXAMPLE OF MINES APPLICATION

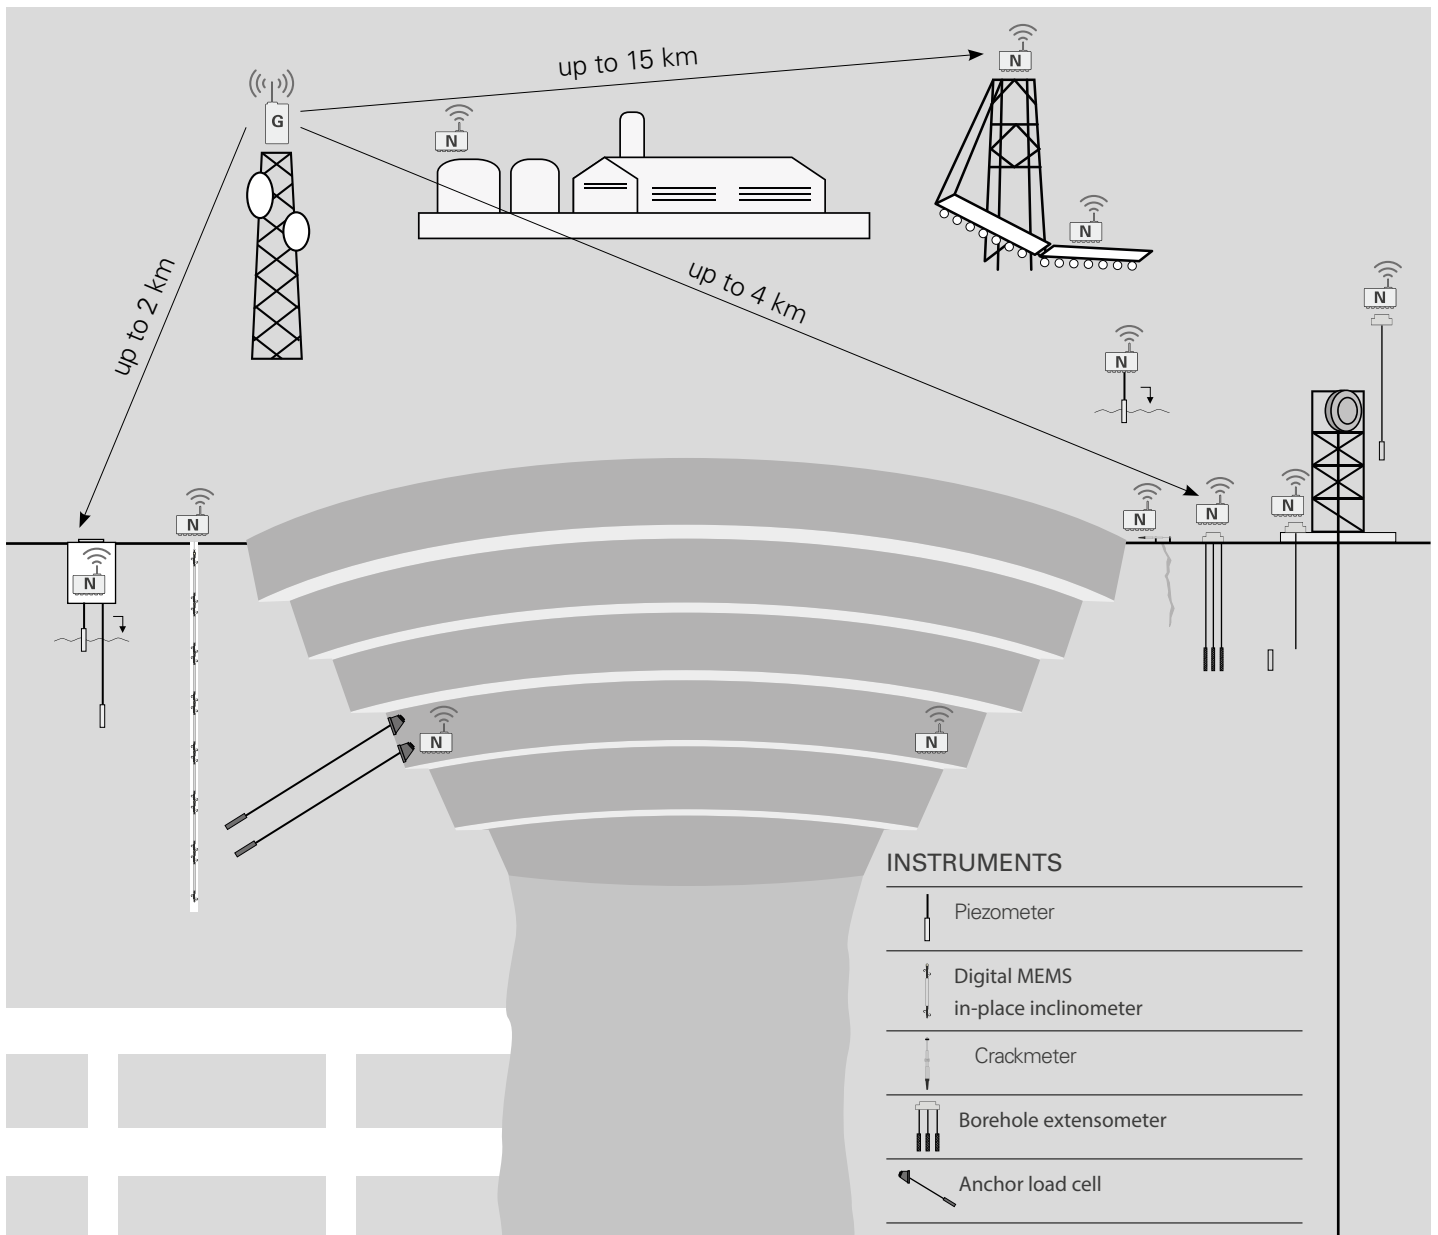

EXAMPLE OF TUNNEL APPLICATION

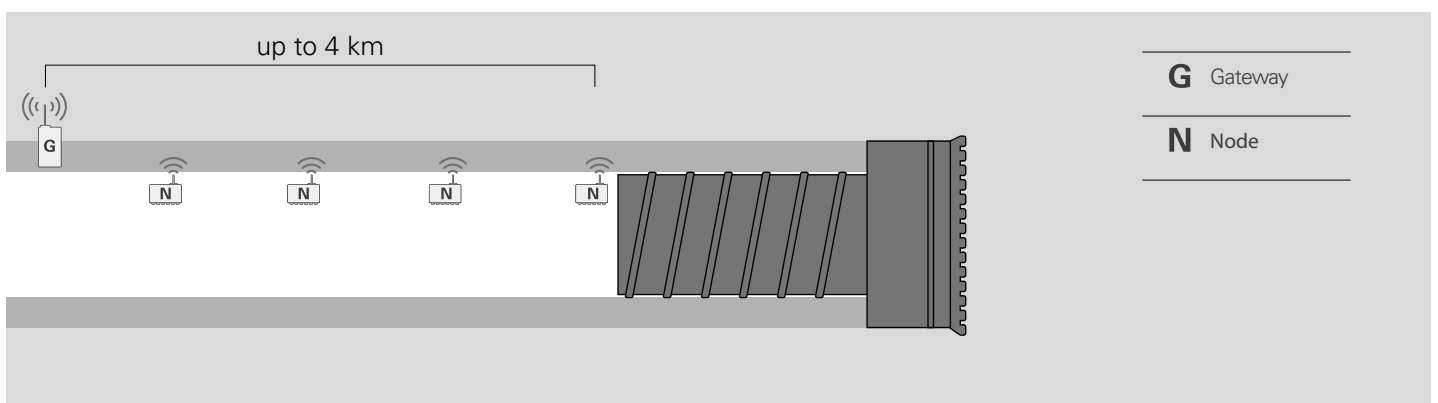

EXAMPLE OF DAM APPLICATION

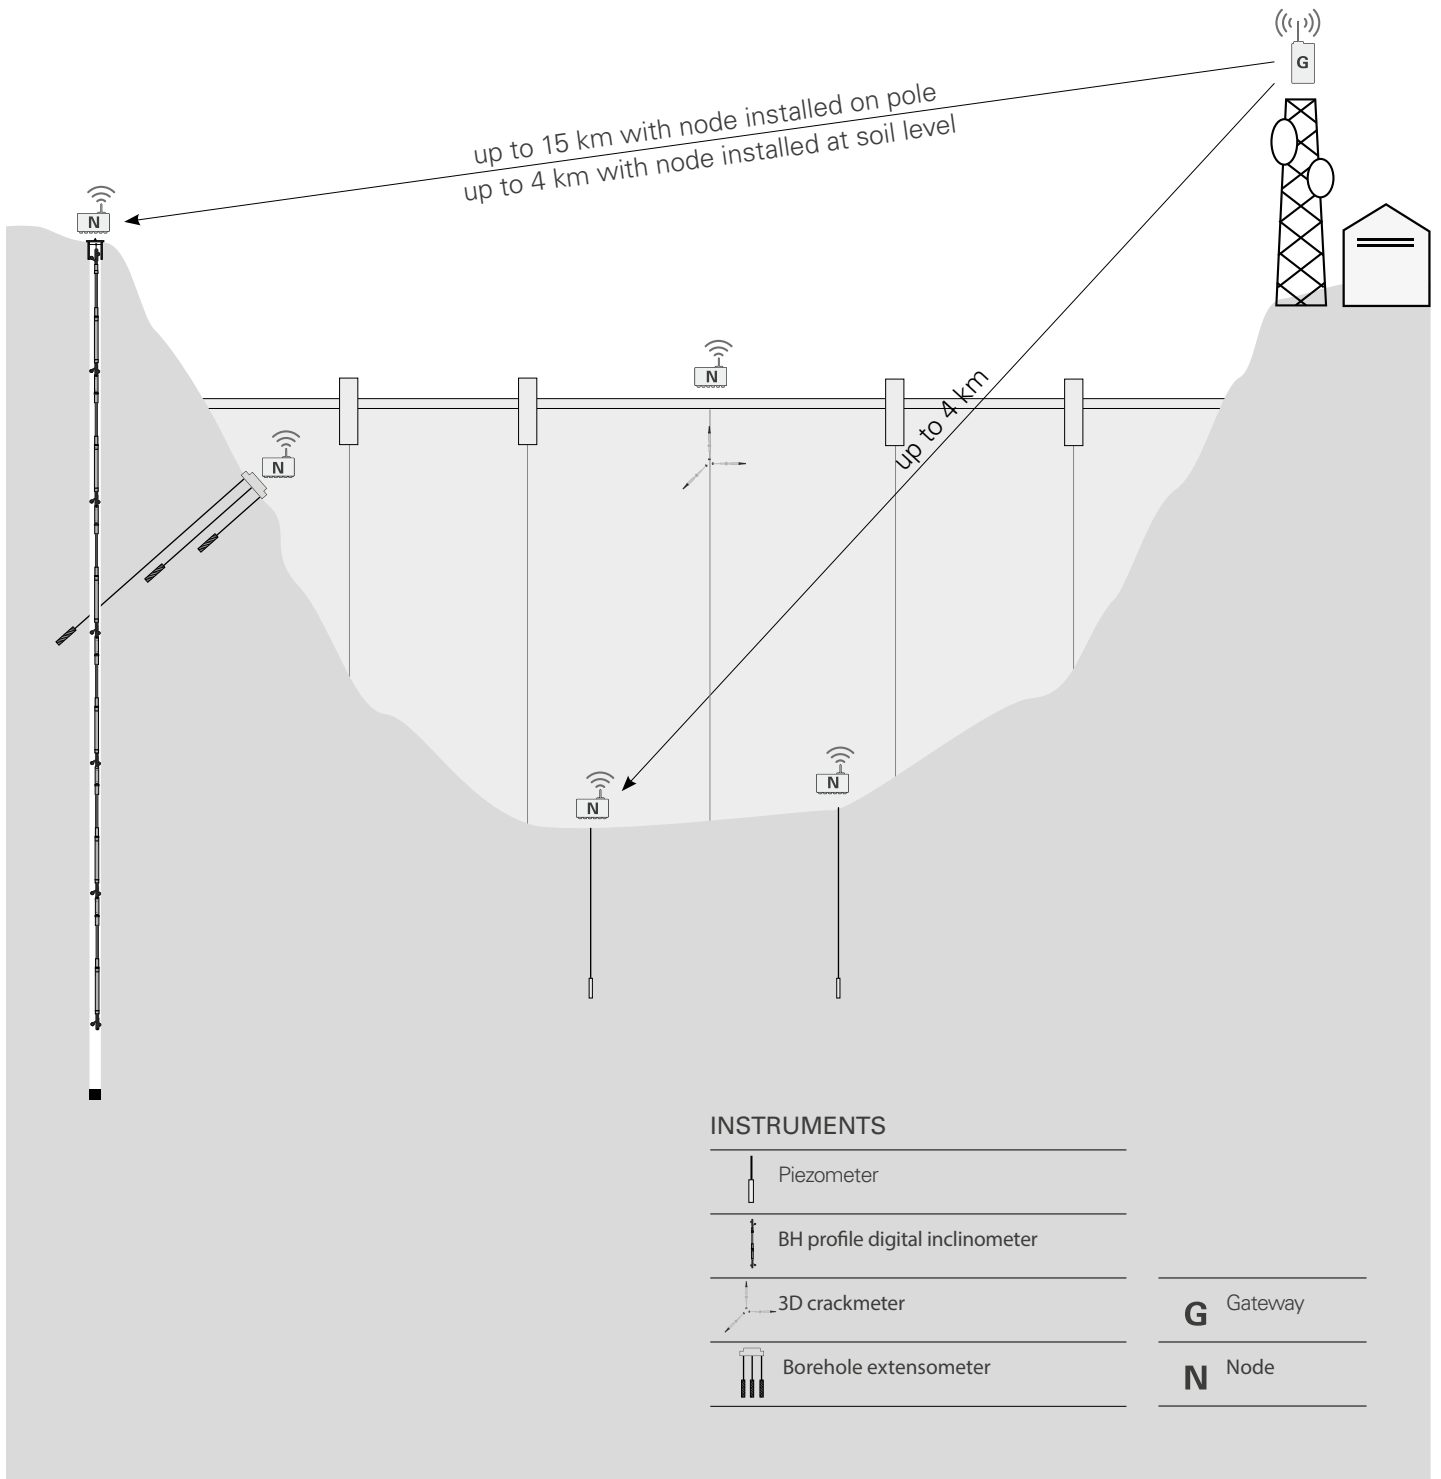

ACCESSORIES AND SPARE PARTS

C-SIZE BATTERY FOR NODES OLSWROBATT

3.6 V lithium-thionyl chloride high power C-size spiral cell for nodes power supply.
Minimum pulse capability: 2000mA.
Minimum continuous current: 1000mA.
Minimum capacity: 6.0Ah.

POLE MOUNTING BRACKET FOR NODES OLSACPOLPL8

Plate for pole mounting of nodes. It includes U-bolts and nuts for Ø 50 mm poles.

WALL MOUNTING BRACKETS FOR NODES OLSACCMWALL

Suitable for all nodes model, except for Mininode. Composed by 2 mounting Brackets, aluminium made.

WALL MOUNTING BRACKETS FOR MININODE OLSPLAMWALL

Suitable for Mininode only. Composed by 4 mounting Brackets, plastic made.

VERTICAL MOUNTING PLATE FOR WIRELESS TILTMETER OLSACCINCVP

L shaped plate for wireless tiltmeter to be installed on vertical walls.
Overall dimensions: 120x102x50 mm, thickness 10 mm.

HORIZ. MOUNT. PLATE FOR WIRELESS TILTMETER OLSACCINCHPO

Plate for wireless tiltmeter to be installed on horizontal surface. Dimensions 130x102x5 mm.

POLE MOUNT. BRACKET FOR WIRELESS TILTMETER OLSACCINCPL

Plate for pole mounting of wireless tiltmeters. It includes U-bolts and nuts for Ø 50 mm poles.

VERT. MOUNT. PLATE FOR LASER DIST. GAUGE OLSACCLASVPO

Adjustable mounting plate for vertical surface. Anchor bolts not included.

GATEWAY LIGHTENING PROTECTION FOR ETHERNET OLSACCPRETH

Indoor Ethernet surge protection. Transient protection circuit based on high energy gas discharge tubes and a network of fast response silicon avalanche diodes (SAD).

GATEWAY LIGHTENING PROTECTION FOR ANTENNA OLSACCPRANT

RF coaxial surge protection on radio link. P8AX09-6G-N/ MF series from CITEL.

SWIVEL MOUNT. PLATE FOR LASER DIST. GAUGE OLSACCLASSWI

Swivel mounting bracket. For a wall or a convergence bolt with 3/8". Anchor bolts not included.

SOLAR PANEL KIT FOR DIGITAL NODE OAX10W003AH

It is composed by a 10W solar panel with 10m cable and a plastic box housing the 2.3 Ah battery and charge controller. The IP67 box will house also the digital sensor kit (not included).

DIGITAL SENSOR KIT FOR DIGITAL NODE O0MX24V030W

Electronic boards for powering and wire 1 chain of digital instruments. To be used with solar power kit. For the maximum number of digital instrument of the chain please refer to the dedicated table.

GATEWAY POWERING KIT THROUGH USB C OLSACCUSBGW

Kit to power the gateway through USB C from photovoltaic system (12V in, 5V out). It includes a 3m USB cable A male to C male, a cable gland and an indoor DC/DC converter (IN: 9-36Vdc, OUT: 5.1Vdc). Photovoltaic system not included.

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.
We reserve the right to change our products and specifications without prior notice. The datasheet is issued in English and other languages.
In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

SISGEO S.R.L.

VIA F. SERPERO 4/F1
20060 MASATE (MI) ITALY
PHONE +39 02 95764130
FAX +39 02 95762011
INFO@SISGEO.COM

TECHNICAL ASSISTANCE

SISGEO offers customers e-mail and phone assistance to ensure proper use of instruments and readout and to maximize performance of the system.

For more information, email us: assistance@sisgeo.com